




Acconet Indoor Cabinet Swing Frame


Features

- Welded frame, double section, compatible with 19" standard equipment's.
- 5mm tempered glass front door with over 180 turning degree;
- Removable side panel, easy to install and lock optional;
- Cable entry on the top and bottom;
- L-shaped mounting profile, easy to adjustable on the mounting rail;
- Fan cut-out on the top, easy to install fan;
- Installing back panel, easy to fix on the wall;
- Various accessories for option;


| | |
|-----------------------|--|
| Standard | ANS/EIA RS-310-D, IEC297-2, DIN41491, PART1, DIN41491, PART7, ETSI Standard |
| Material | SPCC quality cold rolled steel thickness: 1.2mm Tempered glass Thickness:5mm |
| Loading Capacity | Static loading: 60kg |
| Degree of protection | IP20 |
| Surface finish | Degreasing, Pickling, Phosphating, Powder Coated |
| Product specification | 4U-12U |
| Width | 600mm |
| Depth | 450mm |

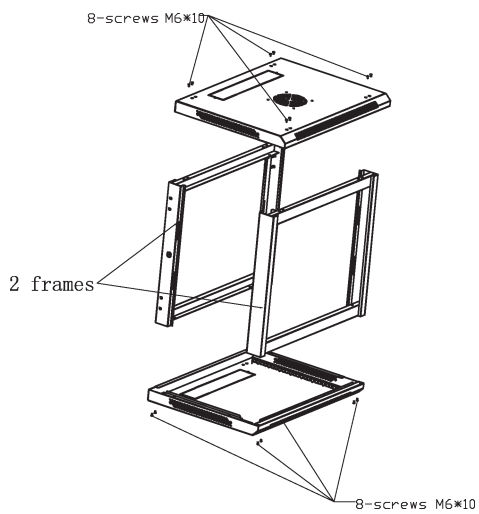


①

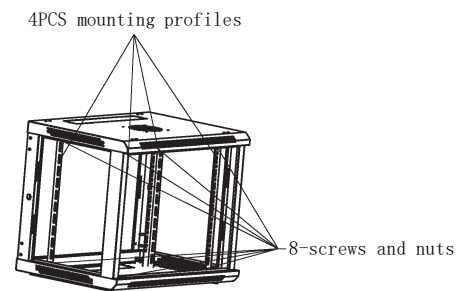


②

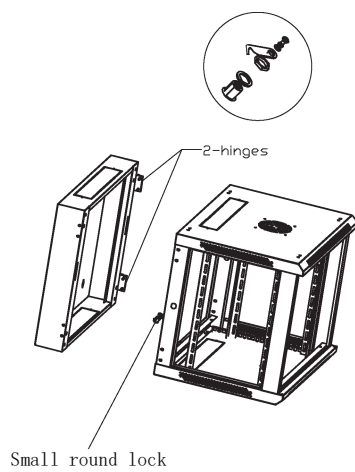


③

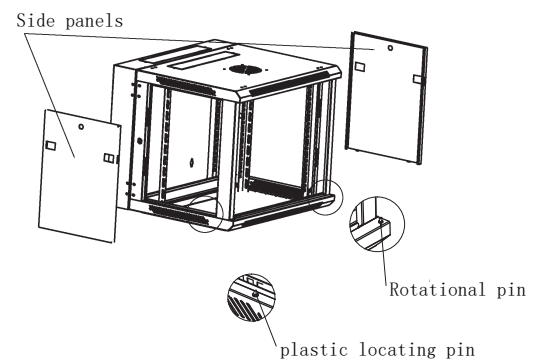

④

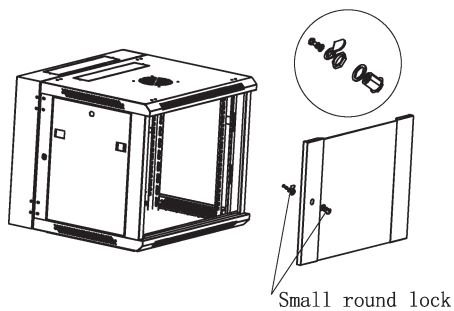

⑤



⑥