

UniFi

Pro Max Datasheet

MiRO

Pro Max | 24 Port

SKU: UB-USW-PRO-MAX-24



A 24-port, Layer 3 Etherlighting switch with 2.5GbE. Etherlighting ports that illuminat to indicate port location, speed/link, and native VLAN/network. 8 x 2.5GbE RJ45 ports. 16 x GbE RJ45 ports. 2 x 10G SFP+ ports. DC power backup ready. Managed with UniFi Network 8.0.24 and later.

Pro Max | 24 Port

SKU: UB-USW-PRO-MAX-24

Mechanical

Dimensions	442 x 325 x 44 mm (17.4 x 12.8 x 1.7")
Weight	Without mounting brackets: 4.2 kg (9.3 lb)
With mounting brackets:	4.3 kg (9.5 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(16) GbE RJ45 ports (8) 1/2.5 GbE RJ45 ports (2) 10G SFP+ ports
Total non-blocking throughput	56 Gbps
Switching capacity	112 Gbps
Power method	(1) Universal input, 100—240V AC, 50/60 Hz (1) USP-RPS DC input
Power supply	AC/DC, internal, 50W
Supported voltage range	100—240V AC
Max. power consumption	50W
LCM display	(1) 1.3" touchscreen
Button	Factory reset
Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Etherlighting™

Ethernet	Locating Speed/link Native VLAN/network
SFP+	Locating Speed/link Native VLAN/network

LEDs

System	Status
RPS	Status

Application Requirements

UniFi Network	Version 8.0.24 and later
---------------	--------------------------



UniFi

Pro Max Datasheet

MiRO

Pro Max | 24 Port

SKU: UB-USW-PRO-MAX-24

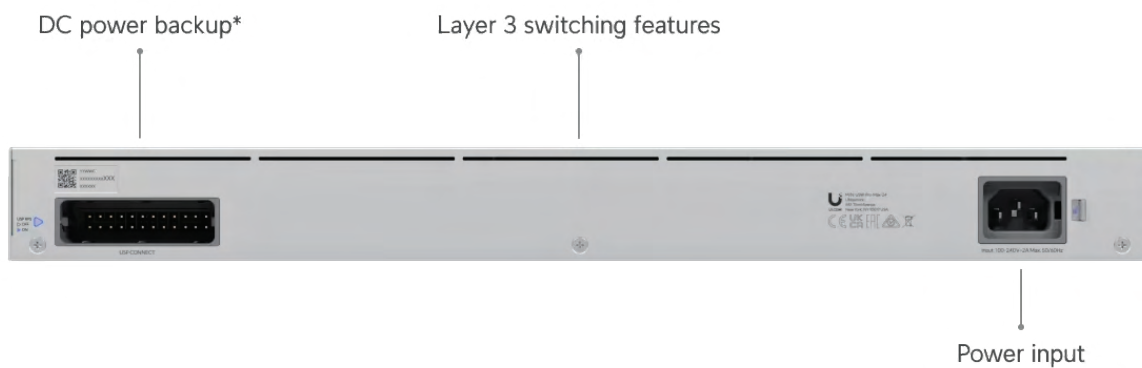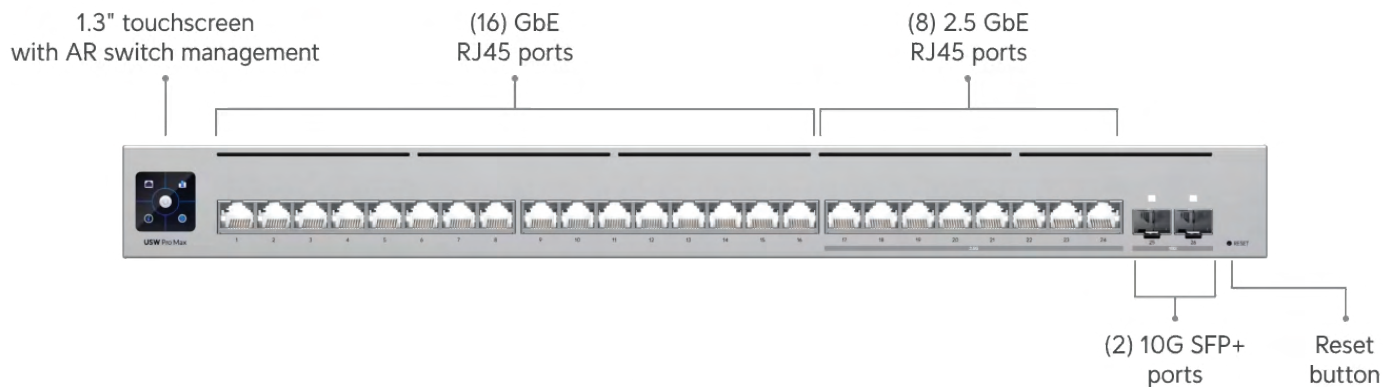

(24) Etherlighting™ ports that illuminate to indicate port location, speed/link, and native VLAN/network**



*Require UniFi Power Backup.

**Pair with UniFi Etherlighting Patch Cables for optimal brightness.